




SC-3402 4/6/8/10/12 Channel Infrared Radiation Panel

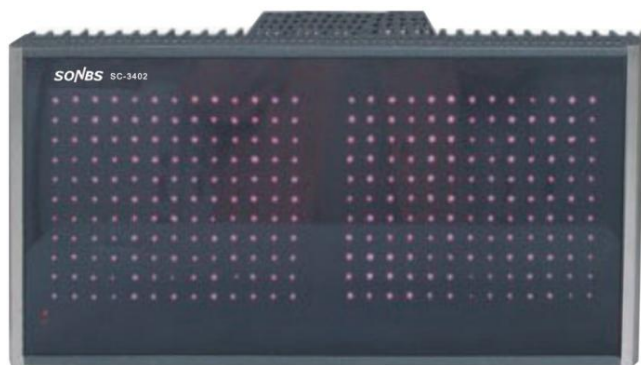

Product Description

SC-3402 is a radiant panel with super strong infrared emission capability. A variety of transmission powers can be selected, and the distance can reach 50 meters (25W). Connect with the host to realize the function of infrared voice emission.

Features

1. Super launch capability, the longest distance can reach 50 meters.
2. It has the function of switching on and off synchronously with the host.
3. A variety of adjustable transmitting power (25W) to adapt to different venue environments.
4. Emission intensity halving function. Reduce signal power, convenient for use in small environments.
5. Multiple radiation units can be connected in series in a "hand in hand" manner.
6. Half-value launch angle: $\pm 30^\circ$.
7. It can be installed fixedly (equipped with a universal bracket) or installed with a tripod bracket.

Technical Parameter

Power supply	AC100-240V
Transmitting power	25W
Half-value launch angle	$\pm 30^\circ$
RF input	Impedance: 10K Ω Amplitude: 100Mv-3V
Maximum coverage distance	300 m ² (at 15W)
Color	gray black
Dimensions	433(L)X232(W)X51(H)mm
Weight	about 5KG